


Çok Tüplü, Çift Kılıflı Zırhlı LSOH-PE Fiber Optik Kablo (MLT SM-MM DJSA)



Çok Tüplü Çift Kılıflı Zırhlı Kablolar

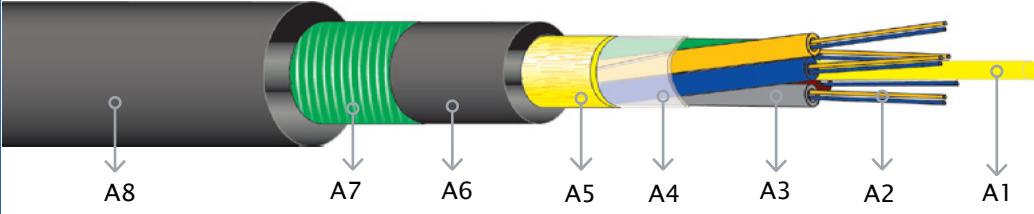

- A1 Merkez Elemanı
- A2 Optik Fiber
- A3 Tüp Dolgu Maddesi
- A4 Şeffaf Sargı
- A5 Aramid İplik (Kevlar)
- A6 İç Kılıf
- A7 Çelik Zırh
- A8 Dış Kılıf

PHYSICAL DESCRIPTION

- 2-4-6-8-12-16-24-36-48-60-72-96-144-288 fibers armored outdoor fiber optic cable,
- Thixotropic jelly filled loose tubes,
- Loose tubes and filler (if any) are SZ stranded around the non-metallic central strength member (FRP),
- Jelly filled core,
- Polyester tape as core wrap,
- Inner jacket is made of halogen free fire retardant compound,
- Corrugated steel armor,
- Outer jacket is made of halogen free fire retardant compound,
- Ripcords are inserted for easy jackets removal.

DESCRIPTION

Fiber Type	SM G652 D, G657 A1, G657 A2, G655 MM 62.5 OM1, 50/125 OM2, 50/125 OM3, 50/125 OM4
Central strength member	All-dielectric FRP
Tube material	PBT (Polybutylene Terephthalate)
Color of fibers in per tube	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Color of loose tubes	Blue, Orange, Green, Brown, Slate, White, Red, Black
Color of loose tubes (288 fibers)	First layer: Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow Second layer: Violet, Pink, Aqua, Blue with black tracer, Orange with black tracer, Green with black tracer, Brown with black tracer, Slate with black tracer, White with black tracer, Red with black tracer, Black with white tracer, Yellow with black tracer, Violet with black tracer, Rose with black tracer, Aqua with black tracer
Tube filling compound	Thixotropic jelly
Core filling compound	Jelly
Tape wrap	Polyester tape
Ripcord	Aramid cord
Identification tape marking	As a customer request
Inner Jacket	Black HFFR, thickness nominal 1.0±0.1 mm.
Armor	Corrugated steel tape
Outer jacket	Black HFFR, thickness nominal 1.5±0.1 mm.
Surface Marking	As a customer request

Fiber Count	Number of Tube	Nuber of Filler	Number of fiber in per tube	Central Strength Member OD(mm)	Central strength Member OD(mm)	Tube Out-er/Inner Diameter(mm)	Cable Diameter(mm)	Cable Weight(kg/ km)
2	1	5	2	2.5	N/A	2.4/1.7*	14.8*	238*
4	2	4	2	2.5	N/A	2.4/1.7*	14.8*	236*
6	3	3	2	2.5	N/A	2.4/1.7*	14.8*	234*
8	2	4	4	2.5	N/A	2.4/1.7*	14.8*	236*
12	3	3	4	2.5	N/A	2.4/1.7*	14.8*	234*
16	4	2	4	2.5	N/A	2.4/1.7*	14.8*	232*
24	6	–	4	2.5	N/A	2.4/1.7*	14.8*	229*
36	6	–	6	2.5	N/A	2.4/1.7*	14.8*	229*
48	6	–	8	2.5	N/A	2.4/1.7*	14.8*	230*
60	5	1	12	2.7	N/A	2.6/1.8*	15.4*	251*
72	6	–	12	2.7	N/A	2.6/1.8*	15.4*	249*
96	8	–	12	2.7	4.5*	2.6/1.8*	17.2*	297*
144	12	–	12	2.7	8.0*	2.6/1.8*	20.7*	381*
288	24	–	12	2.7	5.3*	2.6/1.8*	23.7*	519*

*:Tolerance is $\pm 10\%$

Mechanical and Environmental Properties

Physical tests	Value	Requirement	Standart
Tensile Strength	2500 N (during Installation) 1500 N (during Operation)	Maximum loss:0.05 dB	IEC 60794-1-E1
Impact Resistance	10J, 3 impacts	No fiber break	IEC 60794-1-E4
Crush Resistance	440 N/cm	No fiber break	IEC 60794-1-E3
Temperature Cycling	-40 to +70 °C	Maximum loss:0.05 dB	IEC 60794-1-F1
Bend Radius (during instal-lation)	20x cable diameter	Maximum loss:0.05 dB	IEC 60794-1-E11
Bend Radius (during Ser-vice)	10x cable diameter	Maximum loss:0.05 dB	IEC 60794-1-E11
Repeating Bending	20x cable diameter between	Maximum loss:0.05 dB	IEC 60794-1-2 E6
Flame Reterdancy	IEC 60332-3	According to IEC 60332-3	IEC 60332-3
Operation Temperature	-40 to +70 C		
Storage and Transporta-tion Temperature	-40 to +70 C		
Installation Temperature	-30 to +60 C		
Reel Marking	As a customer request		
Metal Plate at drum	As a customer request		

STANDART SM FIBER ITU-T G 652 D

PROPERTIES	SPECIFIED Value
Attenuation (max)	0.40 dB/km (1310 nm) 0.25 dB/km (1550 nm)
MFD	9.2±0.4 µm (1310 nm) 10.4±0.5 µm (1550 nm)
Chromatic Dispersion (max)	3.5 ps/(nmxkm)(1310 nm) 18 ps/(nmxkm)(1550 nm)
Cladding diameter	125 ± 0.3 µm
Core/Clad Concentricity error	≤ 0.5 µm
Zero dispersion wavelength	1300nm≤ ≤1324nm
Cladding non-circularity	≤ 0.7 %
Coating diameter	245 ± 10 µm
Cut Off Wavelength	≤ 1260nm
Proof Test	≥ 1% (100kpsi or 0.7GPa)

NON-ZERO DISPERSION SHIFTED SM FIBER ITU-T G 655

PROPERTIES	SPECIFIED Value
Attenuation (max)	0.25 dB/km (1550 nm)
MFD	9.6 ± 0.4 µm (1550 nm)
Chromatic Dispersion at 1530–1565 nm	2.0–6.0 ps/(nmxkm)nm)
Chromatic Dispersion at 1565–1625 nm	4.0–12.0 ps/(nmxkm)
Cladding diameter	125 ± 0.7 µm
Core/Clad Concentricity error (max)	0.6 µm
Cladding non-circularity (max)	% 0.7
Coating diameter	245 ± 5 nm
Cut Off Wavelength	≤ 1450nm
Proof Test	≥ 1% (100kpsi or 0.7GPa)

STANDARD SM FIBER ITU-T G 657 A

PROPERTIES	SPECIFIED Value
Attenuation (max)	0.40 dB/km (1310 nm) 0.25 dB/km (1550 nm)
MFD	9.0±0.4 µm (1310 nm) 10.1±0.5 µm (1550 nm)
Cladding diameter	125±0.7µm
Core/Clad Concentricity error (max)	0.5 µm
Zero dispersion wavelength	1300nm≤ ≤1324nm
Cladding non-circularity (max)	% 0.7
Coating diameter	242±7 µm
Cut Off Wavelength	≤1260nm
Proof Tensile Test	≥ 1% (100kpsi or 0.7GPa)
Macro bending Attenuation : (10 turn on a 15 mm radius mandrel)	≤ 0.25 dB @1550 nm

SM FIBER ITU-T G 657 A2 Bend Insensitive

PROPERTIES	SPECIFIED Value
Attenuation (max)	0.35 dB/km (1310 nm) 0.22 dB/km (1550 nm)
MFD	$8.6 \pm 0.4 \mu\text{m}$ (1310 nm)
Cladding diameter	$125 \pm 0.7 \mu\text{m}$
Core/Clad Concentricity error (max)	$0.5 \mu\text{m}$
Zero dispersion wavelength	$1302\text{nm} \leq \leq 1322\text{nm}$
Cladding non-circularity (max)	% 1
Coating diameter	$240 \pm 5 \mu\text{m}$
Cut Off Wavelength	$\leq 1260\text{nm}$
Proof Tensile Test	$\geq 1\%$ (100kpsi or 0.7GPa)
Macro bending Attenuation : (1 turn on a 7.5 mm radius mandrel)	$\leq 0.5 \text{ dB @ } 1550 \text{ nm}$

62.5/125 μm MM OM1 OPTICAL FIBER

PROPERTIES	SPECIFIED Value
Attenuation (max)	3.5 dB/km (850 nm) 1.5 dB/km (1300 nm)
Bandwidth (min)	200 MHz.km(850 nm) 600 MHz.km(1300 nm)
Numerical Aparature	0.275 ± 0.015
Core Diameter	$62.5 \pm 2 \mu\text{m}$
Cladding Diameter	$125 \pm 1 \mu\text{m}$
Core/Clad Concentricity error	$\leq 1 \mu\text{m}$
Cladding non-circularity	$\leq 0.7 \%$
Coating Diameter	$242 \pm 5 \mu\text{m}$
Proof Test	$\geq 100\text{kpsi}$ or 0.7GPa

50/125 μm MM OM2 OPTICAL FIBER


PROPERTIES	SPECIFIED Value
Attenuation (max)	3.5 dB/km (850 nm) 1.5 dB/km (1300 nm)
Bandwidth (min)	700 MHz.km(850 nm) 500 MHz.km(1300 nm)
Numerical Aparature	0.200 ± 0.015
Core Diameter	$50 \pm 2 \mu\text{m}$
Cladding Diameter	$125 \pm 1 \mu\text{m}$
Core/Clad Concentricity error	$\leq 1 \mu\text{m}$
Cladding non-circularity	$\leq 0.7 \%$
Coating Diameter	$242 \pm 5 \mu\text{m}$
Proof Test	$\geq 100\text{kpsi}$ or 0.7GPa

50/125 µm MM OM3 OPTICAL FIBER


PROPERTIES	SPECIFIED Value
Attenuation (max)	3.5 dB/km (850 nm) 1.5 dB/km (1300 nm)
Bandwidth (Laser EMB)	2000 MHz.km(850 nm) 500 MHz.km(1300 nm)
Bandwidth (Overfilled)	1500 MHz.km(850 nm) 500 MHz.km(1300 nm)
Numerical Aparature	0.200±0.015
Core Diameter	50 ± 2 µm
Cladding Diameter	125 ± 1µm
Core/Clad Concentricity error	≤ 1 µm
Cladding non-circularity	≤ 0.7 %
Coating Diameter	242 ± 5 µm
Proof Test	≥ 100kpsi or 0.7GPa

50/125 µm MM OM4 OPTICAL FIBER


PROPERTIES	SPECIFIED Value
Attenuation (max)	3.0 dB/km 1.0 dB/km
Bandwidth (Laser EMB)	4700 MHz.km(850 nm) 500 MHz.km(1300 nm)
Bandwidth (Overfilled)	3500 MHz.km(850 nm) 500 MHz.km(1300 nm)
Numerical Aparature	0.2±0.015
Core Diameter	50 ± 3µm
Cladding Diameter	125 ± 3µm
Core/Clad Concentricity error	≤ 1 µm
Cladding non-circularity	≤ 0.7 %
Coating Diameter	242 ± 5 µm
Proof Test	≥ 100kpsi or 0.7GPa

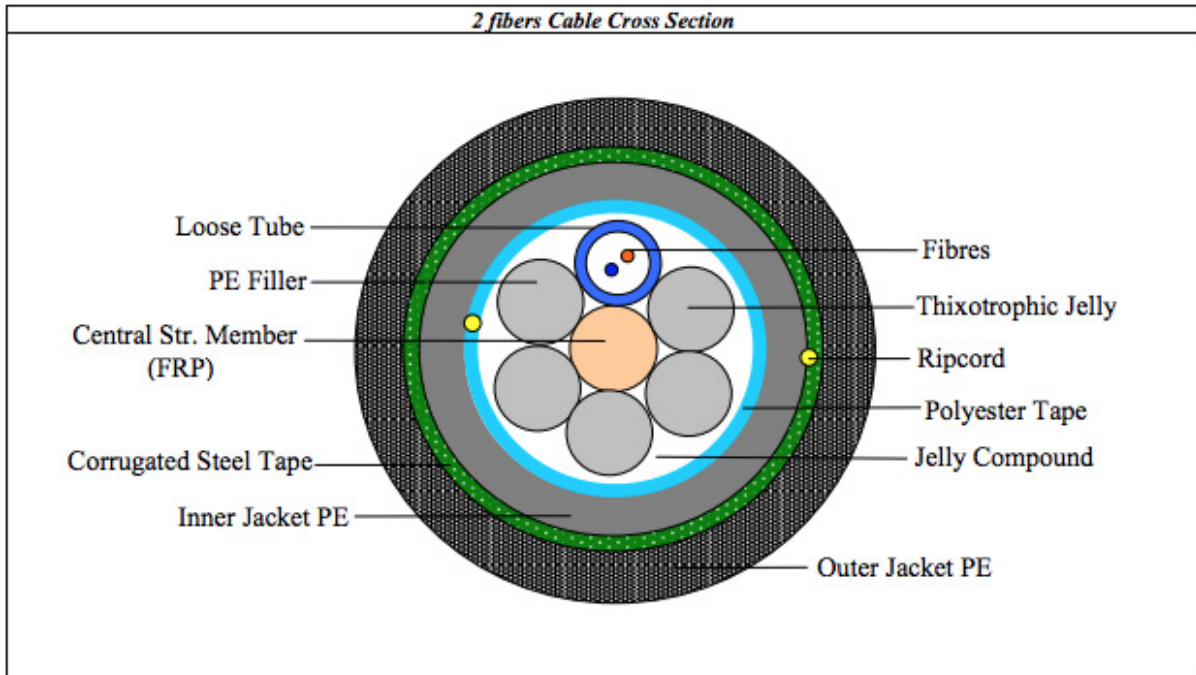


4 fibers Cable Cross Section

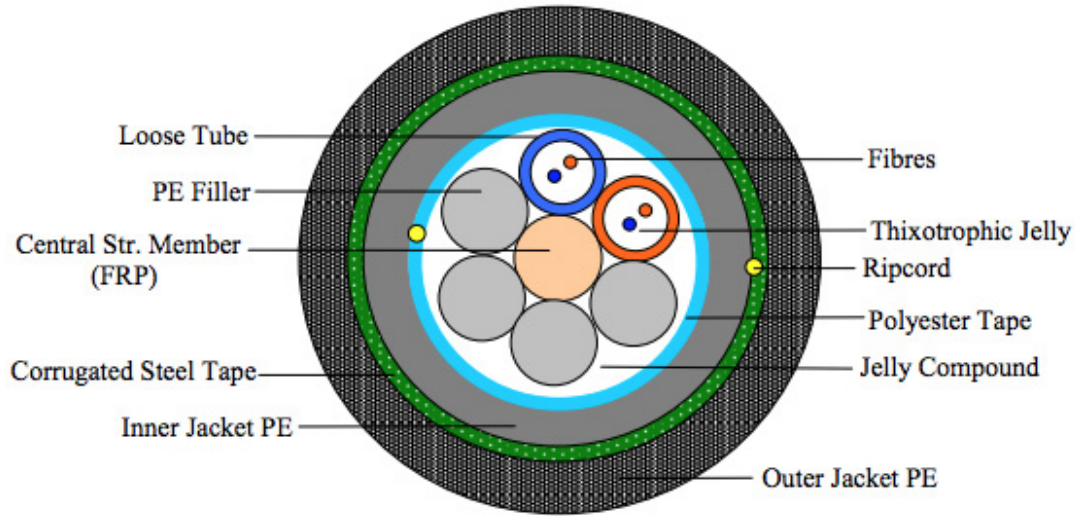


6 fibers Cable Cross Section

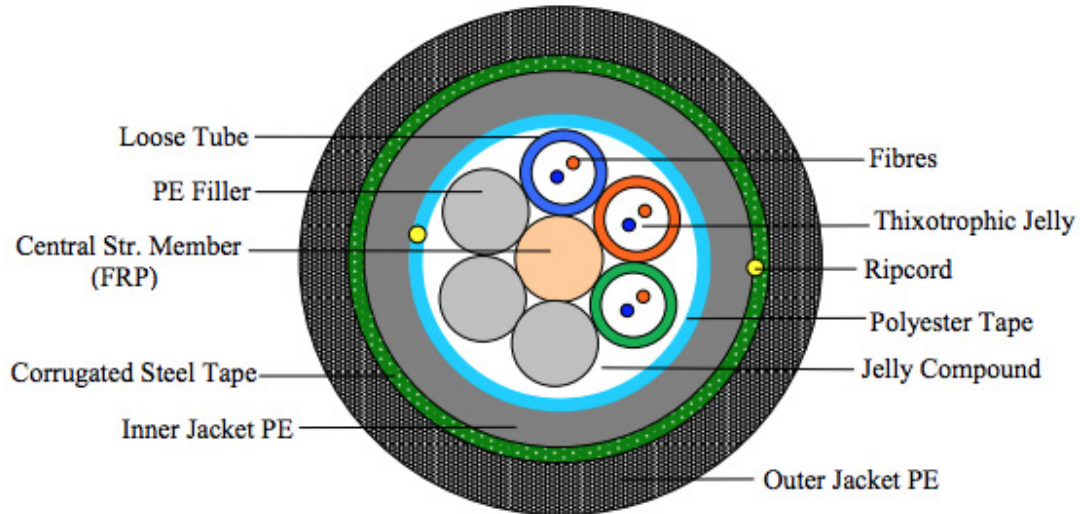


8 fibers Cable Cross Section

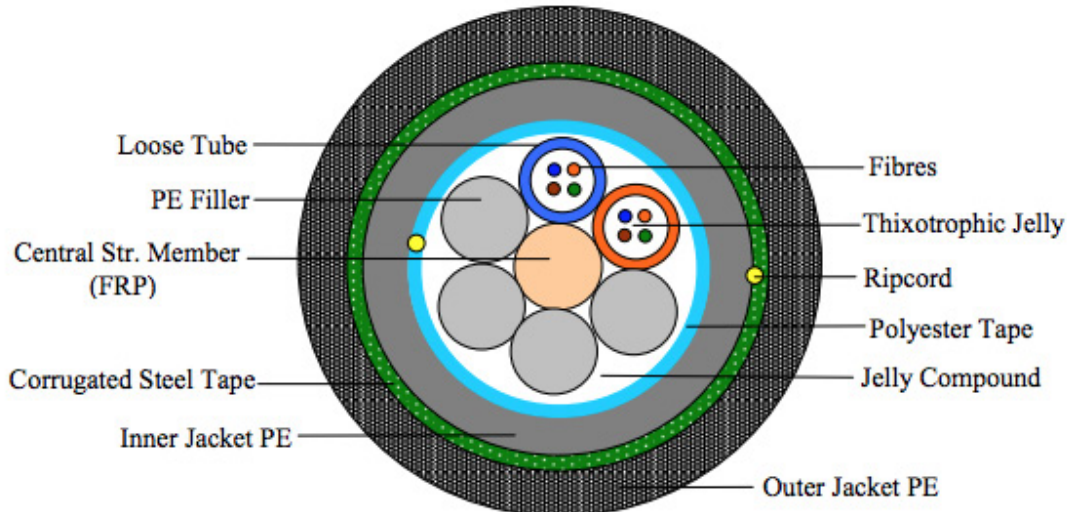


12 fibers Cable Cross Section



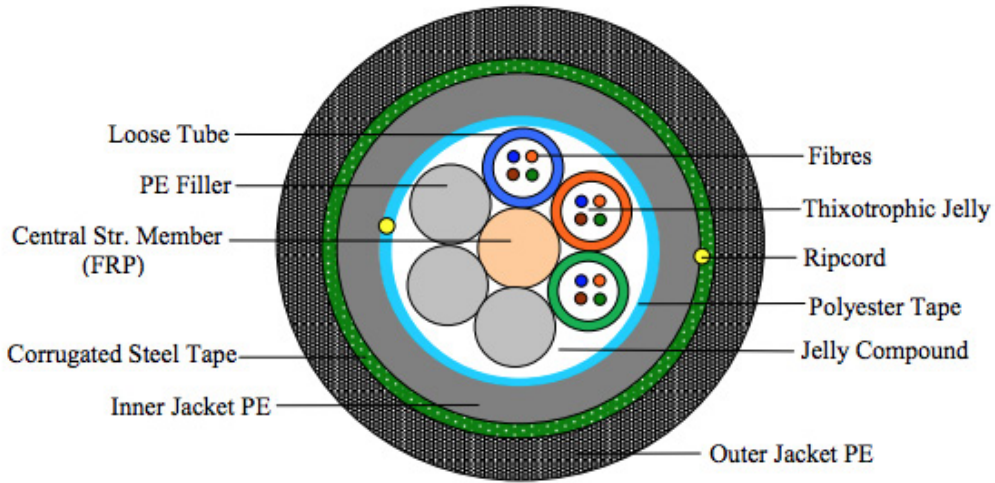


16 fibers Cable Cross Section

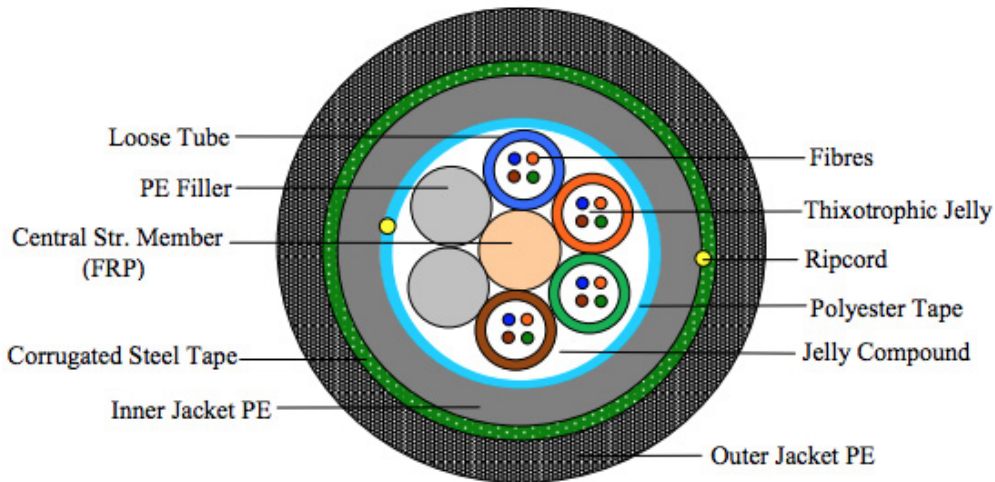


24 fibers Cable Cross Section

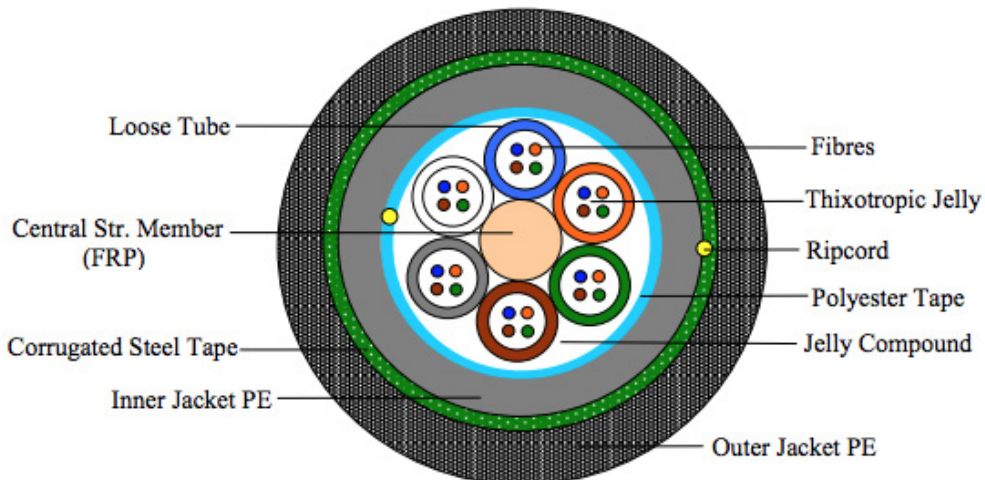


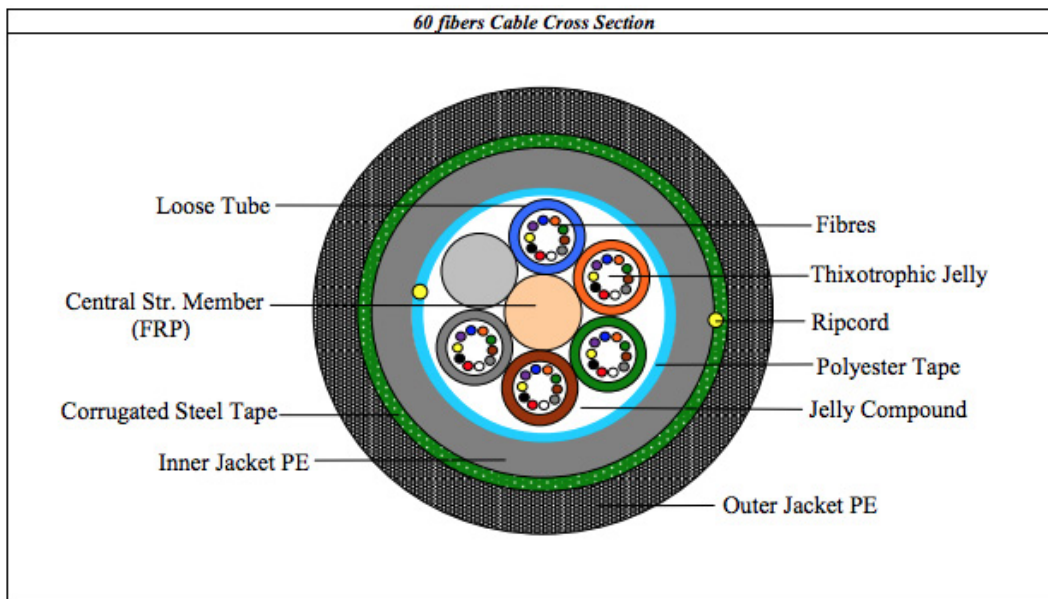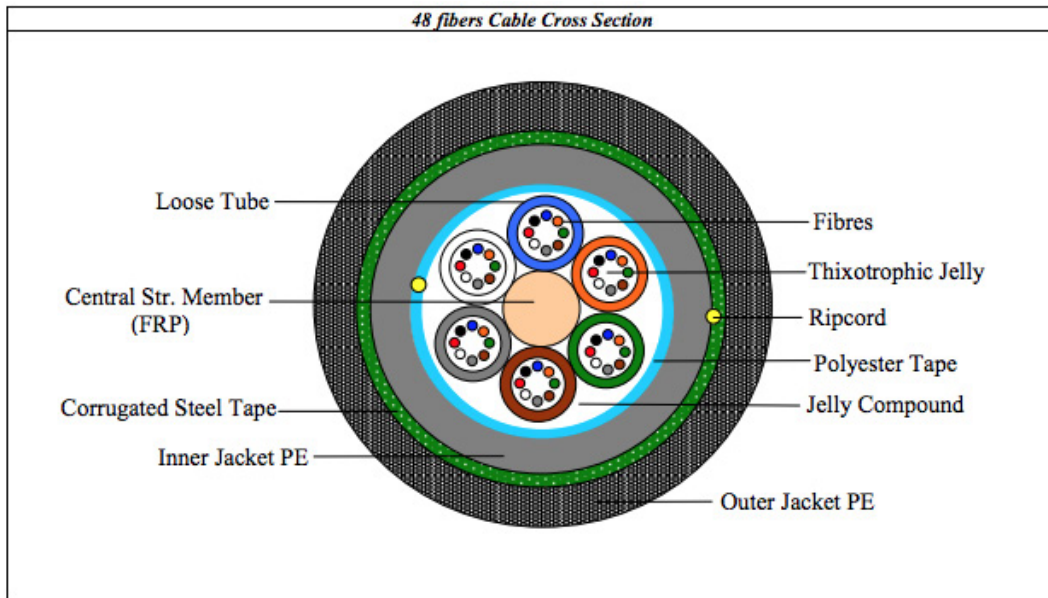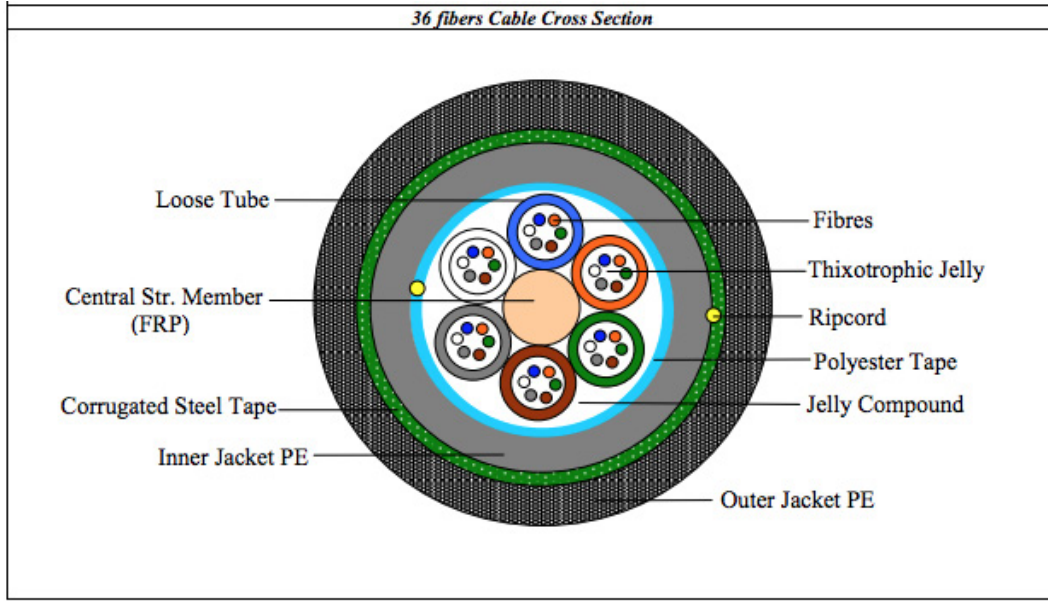

72 fibers Cable Cross Section

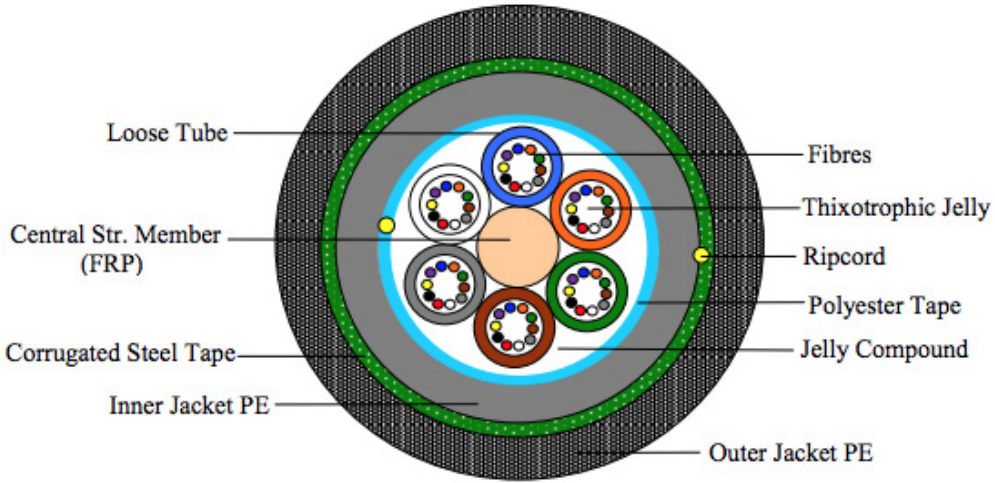

96 fibers Cable Cross Section

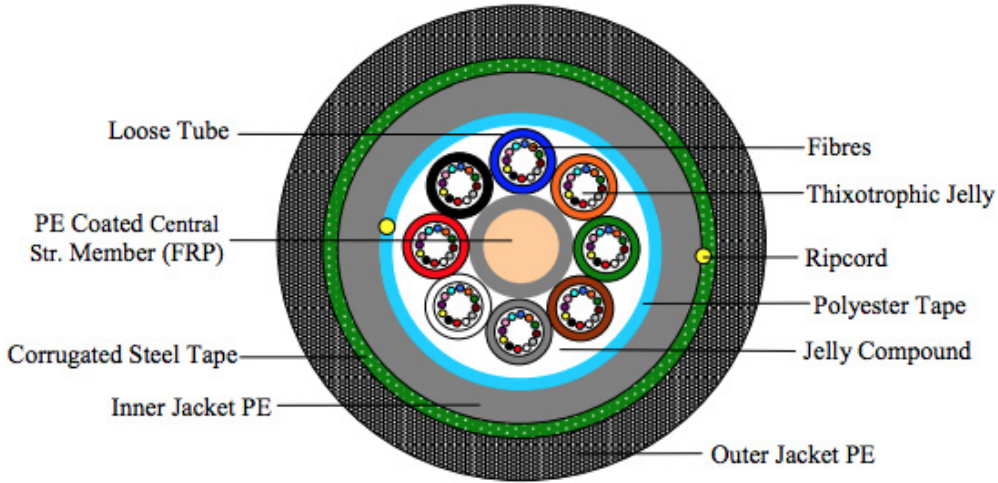

144 fibers Cable Cross Section

