


SC Connectors Series



LC Connectors Series

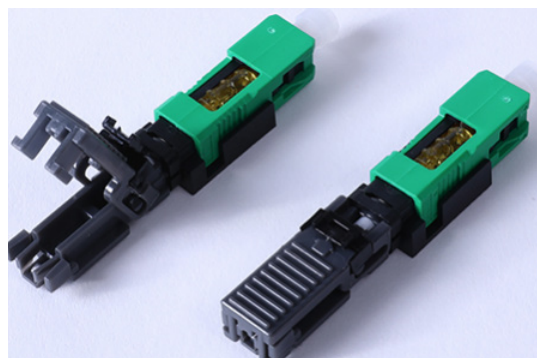

Characteristics

- Solid and reliable performance
- Matchability IEC 61754-20
- EU regulation: RoHS
- Flammability Class: UL94 V-0 (Optional)
- High Success Rate design and technology
- Reusable finishing capability (up to 5 times)

TECHNICAL PARAMETERS

Item	Single Mode(SM)		Multi Mode(MM)
	UPC	APC	UPC
Fiber	SM		OM1, OM2, OM3, OM4
Insertion Loss	$\leq 0.30\text{dB}$ ($\leq \text{max. } 0.50\text{dB}$)	$\leq 0.30\text{dB}$ ($\leq \text{max. } 0.50\text{dB}$)	$\leq 0.30\text{dB}$ ($\leq \text{max. } 0.50\text{dB}$)
Return Loss	$\geq 50\text{ dB}$	$\geq 55\text{ dB}$	-
Radius of Curvature	7~25 / 7~12mm		
Lower Overhang	-125~50 / -100~100 nm		
Temperature Range	-40 C / 85 C		