


Swift CI-02

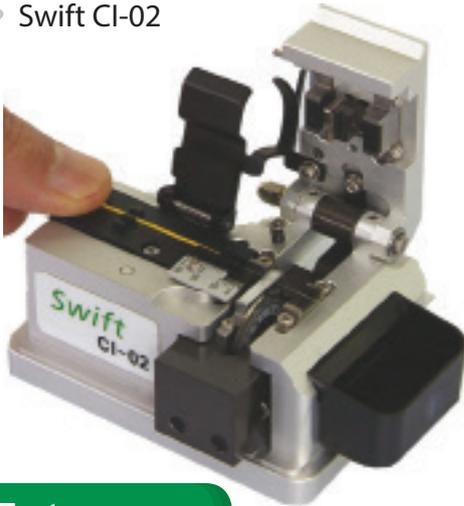

Key Features

- Oil Damper System
- Single Automatic Action for Cleaving and Fiber Chip Collection
- Approx. 20,000 times cleaving available with Diamond Chip Blade Head

Swift CI-03BT



Key Features

- Oil Damper System
- Single Automatic Action for Cleaving and Fiber Chip Collection

Splicer Electrodes



Applications

With long lifetime and protective packaging meet the specific requirements from component manufacturing facilities on fiber splicing players throughout the industry. ILSINTECH is open to better way of deal for blades and electrodes.

Cleaver Blades



Slider bearing



BI-05 Blade

Technical Specification	
Fiber Diameter	125µm
Coating Diameter	250 ~ 900µm
Cleave Angle	0.5°
Cleave Length	Single 7mm ~ 16mm (Universal Holder) Single 7.5mm (SOC, Exchahnge Holder)
Blade Life time	50,000
Outfit Dimension	84 x 65 x 54mm
Weight	420g



BI-07 Blade

Technical Specification	
Fiber Diameter	125µm
Coating Diameter	250 ~ 900µm
Cleave Angle	0.5°
Cleave Length	Single 10mm ~ 16mm (Universal Holder) Single 10mm (Exchahnge Holder)
Blade Life time	75,000
Outfit Dimension	90 x 58 x 50mm
Weight	276g